

# GT Master Waiter™

Always there to assist you!

Institutional - Industrial - Commercial Dumbwaiter

BEST WARRANTY ON THE MARKET

**GT**  
Silver  
**1-Year**  
Warranty\*



Since 1984, Global-Tardif has earned a top reputation manufacturing a full range of reliable, field-proven, innovative elevator products.


The GT Master Waiter™ is the perfect choice to satisfy all of your commercial, industrial or institutional dumbwaiter needs. Ideal for hospitals, hotels, clinics, warehouses, restaurants, retail stores, offices or daycare facilities.

We offer two different models : winding drum or traction dumbwaiters. Both are available for floor-level loading or counterheight loading.

- Efficient
- Proven Reliability & Dependable
- Abundant Safety Features
- Low Maintenance
- Quiet & Smooth Performance
- Robust Construction
- Simple Relay Logic Controller GT-MW3™
- Easy Installation
- User Friendly
- Automatic Call & Send Operation
- Simple Cantilevered System
- Customizable
- Meets or Exceeds CSA B44 or ANSI 17.1 Code
- CSA Approved Components
- Visit Our Website at :

**GT** [Accessibility.com](http://Accessibility.com)

since 1984

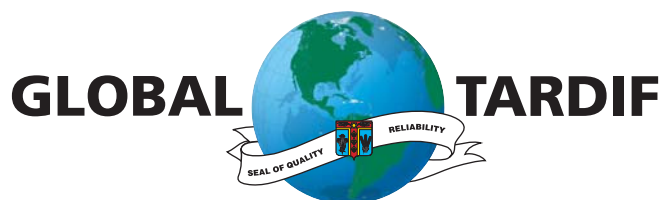

Elevator Manufacturing Group



# GT Master Waiter™

Easy to use, durable and reliable


**GT**  
Silver  
**1-Year**  
Warranty\*

## Standard Features

- 100 to 595 lbs (45 to 270 kg) Capacity
- Up to 50 ft (15 m) Travel - Winding Drum System
- Up to 300 ft (92 m) Travel - Traction 1:1 System
- 50 Fpm (0,25 m/sec) for Winding Drum
- 50 to 75 Fpm (0,25 - 0,375 m/sec) for Traction
- 1, 2 or 3 HP Motor Depending on System Configuration and Speed
- Multiple Voltage 600/480/208V - 3ph. - 60Hz
- **GT-MW3™** Control - Relay Logic
- Call & Send Operation
- Slack / Broken Cable Safety Device
- Heavy Duty "T" Shape Guide Rails
- 1 ½ hr Fire Rated Sound Isolated Machine Access Door
- 1 ½ hr Fire Rated Bi-Parting or Up-Slide Doors
- Illuminated Push Buttons
- "In Use" Light
- Overload Protection
- One (1) Shelf in Car Enclosure

## Options



- Light & Gong
- Self Supporting Tower
- Safety Device (Rail Side / Side Type)
- Custom Size
- Custom Arrangement
- Custom Finishes
- Side Openings
- Up to 200 FPM
- 220V / 1ph. / 60Hz
- Additional Shelves

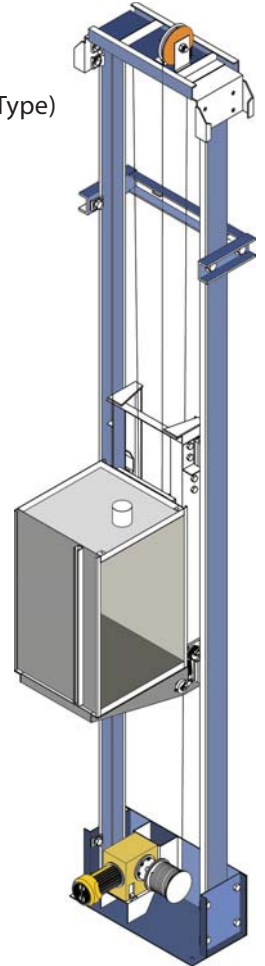

Cantilever Type Shown

Recommended standard sizes (inside dimensions)		
Width	Depth	Height
24" (610 mm)	24" (610 mm)	24" (610 mm)
24" (610 mm)	24" (610 mm)	36" (914 mm)
30" (760 mm)	30" (760 mm)	36" (914 mm)
36" (914 mm)	36" (914 mm)	36" (914 mm)
36" (914 mm)	36" (914 mm)	47 1/4" (1200 mm)

## Hoistway Sizes Chart

		Cantilever Type (shown) 			Rail Side / Side Type (for restrictive area, not shown) 				
Loading Type	Vertical Door	Width	Depth		Width	Depth		Counter Height	Pit Depth
			Front Only	Front & Rear		Front Only	Front & Rear		
Counter Floor	Bi-parting Type	C.W. + 17"	C.D. + 7"	C.D. + 8 ½"	C.W. + 13"	C.D. + 7"	C.D. + 8 ½"	34"	N/A
								N/A	(C.H. / 2) + 6"
Floor	Up Slide Type	C.W. + 17"	C.D. + 7 ½"	C.D. + 9 ½"	C.W. + 13"	C.D. + 7 ½"	C.D. + 9 ½"	N/A	14"

C.W. = Cab Width

C.D. = Cab Depth

C.H. = Cab Height

Your Authorized Dealer is:

For custom size or conventional traction type, contact us

or visit us at

[www.gtaccessibility.com](http://www.gtaccessibility.com)



\* The GLOBAL-TARDIF Limited Warranty covers replacement of any defective parts for a period of one (1) years. Labour cost not included. GLOBAL-TARDIF reserves the rights to discontinue models or options at any time or change the specifications, materials, equipment or pricing without notice and without incurring obligation. U.S. and foreign patents pending. 2004 GLOBAL-TARDIF Elevator Manufacturing Group Inc.

ver. Oct.07